


EV08G2UG1S

8 PoE Giga Ports, 2 Uplink Giga & 1 SFP



FEATURES :

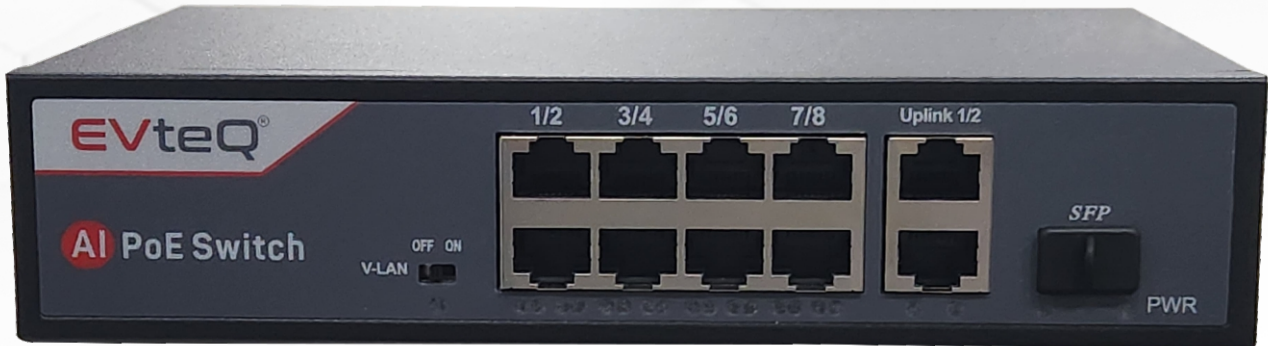

802.3af/at PoE



Extend Mode



Fanless



Fast
Transmission



Watchdog



Low Power
Consumption

- 8 10/100/1000Base-T ethernet ports, 2 1000Base-X uplink and 1 SFP slot
- The 8 port (RJ45 ethernet port) Support IEEE802.3 af/at PoE protocol, An PoE RJ45 port can supply maximum power output of 30W
- Support 10/100/1000Mbps auto-negotiate
- All port support wire-speed forwarding
- Plug and Play, no configuration requirements
- Metal case, internal power supply, and have excellent heat dissipation performance can let the product running stable for a long time
- 6KV lightning protection function
- AI (watchdog) function
- Support VLAN function

EV08G2UG1S

8 PoE Giga Ports, 2 Uplink Giga & 1 SFP

FEATURES SPECIFICATION :

Model	EV-08-2UG-1S	
Port Characteristic	Connector Type	2x4 RJ45, 1x2 RJ45, 1 SFP
	Transmission rate	10/100/1000Mbps auto-negotiate
	Port Function	Power supply priority, fast transmission, MAC automatic learning and aging, IEEE802.3X full-duplex and backpressure half-duplex
	Indicator Light	Each port has 1 Link/ACT 100Mbps and 1 power light; whole machine power indicator; VLAN indicator
	Transmission Speed	100BASE-T:14880PPS/PORT 1000BASE-TX:14800PPS/PORT
Exchange Performance	Forward method	Store-and-forward (full wire-speed)
	MAC address table	2k
	Bandwidth	22G
Power Parameters	Input voltage	AC100~240V
	Power consumption	Standby: ≤3W; whole: ≤120W
	PoE pin	1/2+,3/6-
	The port max rate	≤30W
Environment	Operating Temperature	-20°C ~ 60°C
	Storage Temperature	-30°C to 70°C
	Operating Humidity	90% non-condensing
	Storage humidity	95% non-condensing
Physical Properties	Size	200*142*43mm
	Weight	1.5 KG

*Product Casing And Specifications Are Subject To Change Without Prior Notice